

# Model OT-ES004 Industrial Ethernet Switch Product Datasheet






OT-ES004 Industrial Ethernet Switch supports 4 x 10/100Base-TX electrical port and 1 x 100Base-X optical port.

Its wide operating temperature range and port surge protection make it ideal for high-traffic, real-time outdoor environments. This switch is widely applicable in industrial automation, roadways, schools, residential communities, rail transport, and power monitoring systems.

### **Features**

- ◆ Comply with IEEE802.3/802.3u/802.3x store-and-forward mechanism
- ◆ All ports are capable of wire-speed forwarding to ensure non-blocking message transmission
- ◆ Features port auto-flip (Auto MDI/MDIX) function
- Support redundant power input with overload and reverse polarity protection
- Support full-load operation in a temperature range of -40°C to 85°C
- ◆ Low power consumption with a fanless design

### **Dimension**

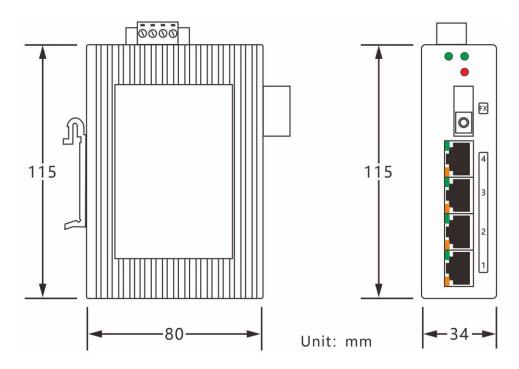

Note: Dimension error value ±1 mm


sales@ourten.com 1 www.ourten.com



## **Technical Parameter**


Category		Description
Interface	Electrical Port	10/100Base-TX RJ45, auto-negotiation
	Optical Port	100Base-X (SC standard, ST/FC optional)
	Power Interface	5.08mm industrial terminal
Standards Conformance	Standards Compliance	IEEE802.3 \ IEEE802.3 u \ IEEE 802.3 x
Power	Power Input	12-24VAC / 9-36VDC redundant input
	Idle Current	0.16A@12VDC (max)
	Full Load Current	0.22A@12VDC (max)
Mechanical Characteristic	Enclosure	High-strength corrugated profile case
	Protection Rating	IP40
	Installation	DIN-rail mounting
	Weight	600g/PC
Operating Environment	Operating Temperature	-40°C∼85°C
	Storage Temperature	-45°C∼85°C
	Operating Humidity	5%~95% (Non-condensation)

## **Installation Instructions**

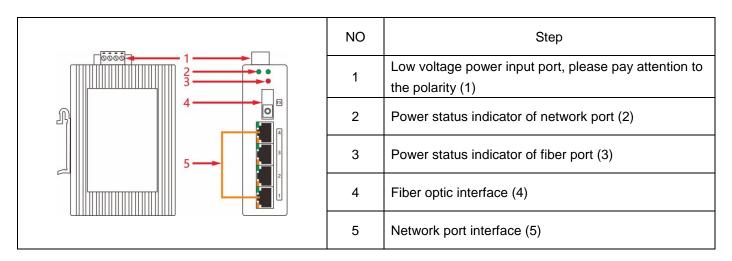



# **Connection Diagram**

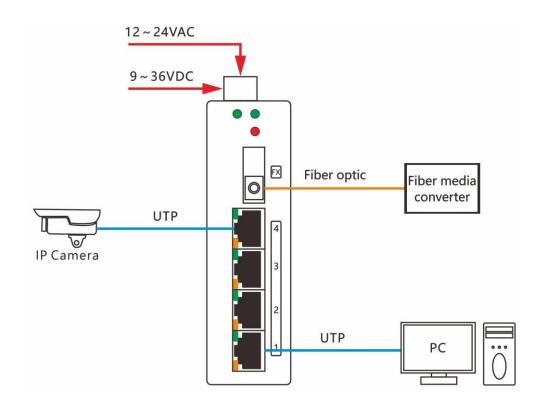



**Shaoxing Ourten Electronics Co., Ltd.** 

#1 Liando U Valley, No. 1999 Wuxing West Road, Shangyu, Zhejiang, China

Tel: +86-21-5888 9980 (+86-575-8213 7256); Fax: +86-575-8212 7256

Email: sales@ourten.com

www.ourten.com

Thank you for choosing Ourten!