



Model SP-M40-385-4P

3-Phase Power Surge Protection Module

Product Datasheet




www.ourten.com

SP-M40-385-4P is 3-Phase Power Surge Protection Module. It is widely used to protect power distribution stations, rooms, cabinets, AC or DC power distribution panels, switch boxes, and various other important equipment vulnerable to lightning.

Features

- ◆ Max. discharge current 40kA for three-phase power protection
- ◆ Modular design with performance status display
- ◆ High discharge capacity, low residual voltage and fast response time
- ◆ Built-in varistor discharge material for long service life

Dimension

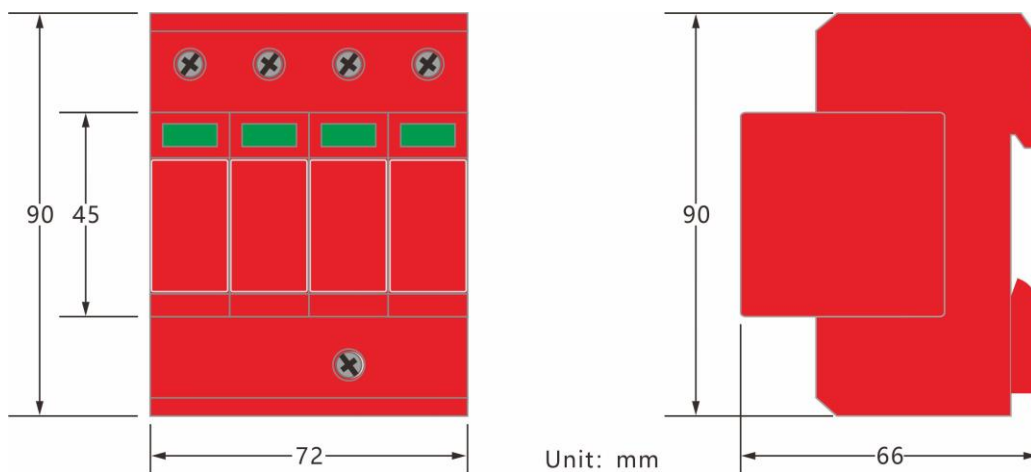


Note: Dimension error value ± 1 mm


Technical Parameter

Category	Description
Working Voltage Un (V)	380
Limiting Voltage Up (V)	385
Normal Discharge Current In (kA)	20
Maximum Discharge Current I _{max} (kA)	40
Response Time (ns)	<25
Leakage Current (μA)	≤20
Protection Level Up (kV)	≤1.8
Terminal Type	Screw Terminal
Weight (g)	395
Working Temperature	-40°C ~ +80°C
Working Humidity	<95% Non-condensation

Installation Diagram

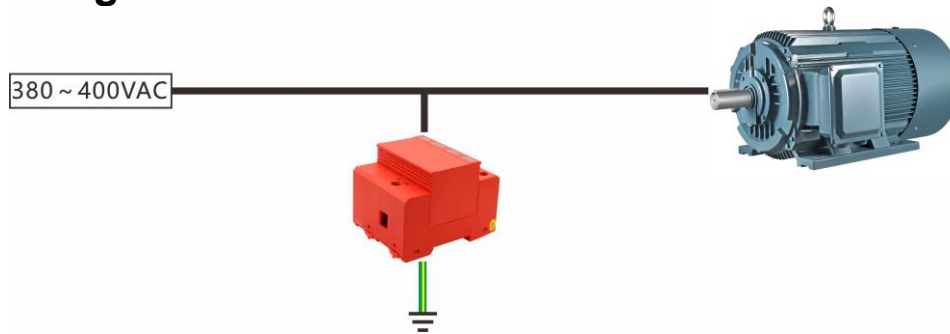

Installation Instructions

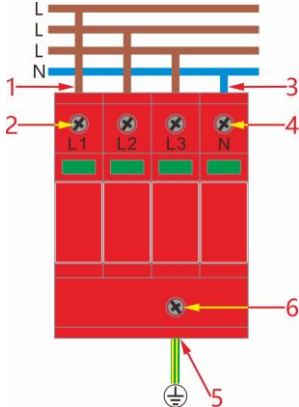	No	Step
	1	Put the wire L of three-phase power line in the screw clip (1)
	2	Turn the nut clockwise, and fix the wire (2)
	3	Put the wire N of three-phase power line in the screw clip (3)
	4	Turn the nut clockwise, and fix the wire (4)
	5	Put the ground lead in the crew clip (5)
	6	Turn the nut clockwise, and fix the wire (6)



Shaoxing Ourten Electronics Co., Ltd.

#1 Liando U Valley, No. 1999 Wuxing West Road, Shangyu, Zhejiang, China

Tel: +86-21-5888 9980 (+86-575-8213 7256); Fax: +86-575-8212 7256

Email: sales@ourten.com

www.ourten.com

Thank you for choosing Ourten!